


| Kapacitet μF | Standart model | |  | EN 60252 |
|----------------------|--------------------|-----------------|---|----------|
| | Diameter D (mm) | Højde H (mm) | | |
| 2 | 28 | 56 | x | |
| 2,5 | 28 | 56 | x | |
| 3 | 28 | 56 | x | |
| 3,15 | 28 | 56 | x | |
| 3,5 | 28 | 56 | x | |
| 4 | 28 | 56 | x | |
| 4,5 | 28 | 56 | x | |
| 5 | 28 | 56 | x | |
| 6 | 28 | 56 | x | |
| 6,3 | 32 | 56 | x | |
| 6,8 | 32 | 56 | x | |
| 7 | 32 | 56 | x | |
| 7,5 | 32 | 56 | x | |
| 8 | 32 | 56 | x | |
| 9 | 36 | 58 | x | |
| 10 | 36 | 58 | x | |
| 11 | 36 | 58 | x | |
| 12 | 36 | 70 | x | |
| 12,5 | 36 | 70 | x | |
| 13 | 36 | 70 | x | |
| 13,5 | 36 | 70 | x | |
| 14 | 36 | 70 | x | |
| 15 | 36 | 70 | x | |
| 16 | 36 | 70 | x | |
| 17,5 | 40 | 68 | x | |
| 18 | 40 | 68 | x | |
| 20 | 40 | 68 | x | |
| 25 | 40 | 93 | x | |
| 30 | 40 | 93 | x | |
| 32 | 40 | 93 | x | |
| 35 | 45 | 93 | x | |
| 40 | 45 | 93 | x | |
| 45 | 50 | 93 | x | |
| 50 | 50 | 93 | x | |
| 55 | 50 | 93 | x | |
| 60 | 50 | 118 | x | |
| 65 | 50 | 118 | x | |
| 70 | 50 | 118 | x | |
| 75 | 50 | 118 | x | |
| 80 | 55 | 122 | x | |
| 90 | 55 | 122 | | |
| 100 | 60 | 122 | | |

RPN - STIKBENS TILSLUTNING



RPC - LEDNINGS TILSLUTNING

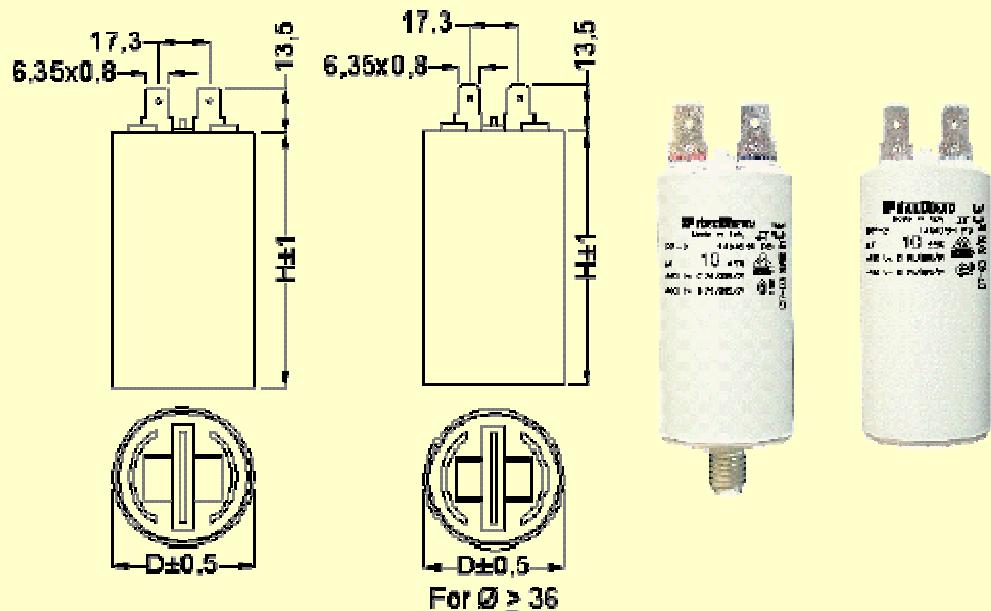